


CE and FC Certified Professional Series of CCTV Surveillance Products



Overview

on the basis of the latest technology, AVI-16C-1030 Digital Video Recorder combines the latest in advanced H.264 video encoding and decoding technologies delivering high performance rock-solid reliability and longer recording times.

AVI-16C-DVR1030 Digital Video Recorder can be used as a standalone video surveillance product, as well as to build up a powerful surveillance network making it is perfect for home or small business applications.

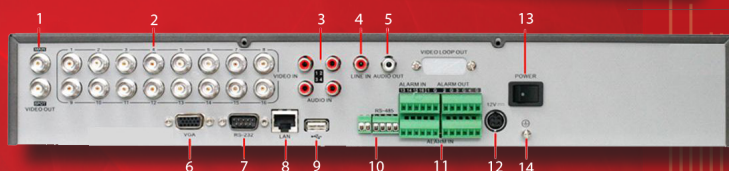

1-main/spot video out 2-Video in 3-Audio in 4-Line in 5-Audio out
6-VGA Interface 7-RS-232 Serial Interface 8-LAN 9-USB Interface
10- RS-485 Interface 11-Alarm in,Alarm out 12-12VDC Power Supply Interface 13-power 14-GND


Features

1. User-friendly GUI for easy operation
2. Up to 1024×768 VGA output resolution
3. Simultaneous VGA and CVBS output
4. Up to 4CIF resolution
5. Scheduled and event recording parameters configurable per individual camera
6. Partial digital zoom by using mouse when in PTZ control mode
7. 16-ch synchronous playback
8. Support dual stream
9. Different recording storage period configurable for each channel
10. NTP, SADP, DHCP protocols supported

Functions & Performances

Compression :

- * PAL/NTSC adaptive video inputs.
- * H.264 video compression with high reliability and superior definition.
- * OggVorbis audio compression standard.
- * Independent video encoding parameters, including frame rate, resolution, bit rate, video quality, etc.
- * Scheduled and event recording parameters configurable for per individual camera.
- * Support dual stream.
- * Encoding for both audio/video composite stream and video stream; audio and video synchronization during composite stream encoding.
- * Compression, storage and network transmission of video image at 4CIF or CIF resolution.
- * Watermark technology.



Local Monitoring :

- * Up to 1024×768 resolution for VGA output display.
- * Simultaneous VGA and CVBS output.
- * 1/4/9/16 - camera video live view, with the camera order adjustable.
- * Group switch, manual switch and automatic cycle modes selectable for video live view, with the auto cycle period configurable.
- * Digital zoom in live view mode.
- * Shield of assigned channel for live view.
- * Privacy masking capability.
- * Multiple PTZ protocols supported, and settings and callup of presets, patrols and patterns.
- * Video image zoom-in by clicking the mouse and tracing by dragging mouse in PTZ control mode.

Hard Disk Management :

- * Connection to 2 SATA hard disks supported, with up to 2TB storage capacity.
- * S.M.A.R.T technology.
- * HDD standby function.
- * HDD file system is compatible with Windows. Use pre-allocating hard disk management technology, and no disk fragments.

Recording :

- * Cycle and non-cycle recording mode.
- * Normal and event video encoding parameters.
- * Multiple recording types, including manual, normal, motion detection, etc.
- * 8 recording time periods with separate recording types.
- * Pre-record and post-record time for motion detection, and pre-record time for schedule and manual recording.
- * Lock and unlock of video files.
- * HDD property can be set to read-only.
- * Video data search and playback by channel number, recording type, time etc.
- * Digital zoom function in playback mode.
- * Pause, play fast, play slow, skip forward, and skip backward when playback, locating in progress bar by dragging the mouse.
- * 16 - channel synchronous playback.

Backup :

- * Record files backed up via USB device.
- * Bunch backup by file or by time.
- * Record files edited for backup in playback.
- * Management and maintenance for backup devices.

Alarm & Exception :

- * Configurable arming time for alarm in/out.
- * Various alarm types supported: alarms for video loss, motion detection, video tempering, video signal abnormal, video in/out format unmatched, illegal access, network disconnection, IP conflict, hard disk error and hard disk full.
- * Various alarm response actions supported: camera recording, relay out, on-screen warning, audible warning and upload to center, etc.
- * Auto recovery from exceptions.

Others :

- * Control of DVR via front panel keys, mouse, IR control and special keyboard.
- * Three-level user management, each user with individual operating permission for DVR and camera.
- * Powerful record and search for log of operation, alarm and exceptions.
- * Import/export of device configuration files.

Network :

- * 10/100M adaptive network interface.
- * TCP/IP protocol suites, PPPoE, DHCP, DNS, DDNS, NTP, SADP protocols, etc.
- * Unicast and multicast supported; TCP and UDP protocols applicable in unicast transmission.
- * Remote search, playback and download, lock/unlock of video files; support breakpoint resume.
- * Remote access and configuration of parameters; remote import/export of device configuration parameters.
- * Remote access of device running status, system log and alarm status.
- * Remote control of DVR via button operation.
- * Remote lock/unlock of panel buttons and mouse.
- * Remote formatting of hard disk, upgrade, reboot/shutdown and other system maintenance operations.
- * RS-485 transparent channel transmission.
- * Event alarm and exceptions upload to remote management host.
- * Remote manual recording.
- * Remote video image capture in JPEG format.
- * Remote PTZ control.
- * Voice talk and broadcast.
- * Built-in WEB Server.

Development :

- * Provision of SDK in Windows and Linux operating systems.
- * Application software source code of Demo.
- * Support and training service for application system development.

Specifications

Model	AVI-16C-DVR1030	
Video/Audio input	Video compression	H.264
	Analog Video input	16-ch, BNC connector (1.0 Vp-p, 75 Ω); PAL / NTSC adaptive
	Audio compression	G.711
	Audio input	4-ch, RCA connector (2 Vp-p, 1 kΩ)
	Voice talk input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (Using AUDIO IN)
	VGA output	1-ch, resolution: 1024 × 768 / 60 Hz
	CVBS output	2-ch, BNC connector (1.0 Vp-p, 75 Ω); Resolution: PAL: 704 × 576, NTSC: 704 × 480
	Audio output	1-ch, RCA connector (Linear, 1 kΩ)
Video/Audio output	Recording resolution	4CIF / 2CIF / CIF / QCIF
	Frame rate	4CIF / 2CIF: 6 fps CIF / QCIF: 25 fps (P) / 30 fps (N)
	Video bit rate	32 kbps ~ 2048 kbps, or user-defined (Max. 3072 kbps)
	Stream Type	Video/Video&Audio
	Audio Bit Rate	64kbps
	Synchronize Playback	16-ch
Hard disk	Type	2 SATA interface
	Capacity	Up to 2TB capacity for each interface
External interface	Network interface	1, RJ45 10 M / 100 M adaptive Ethernet interface
	Serial interface	1 RS-485 interface, 1 RS-232 interface
	USB interface	2, USB 2.0
	Alarm in	16
	Alarm Out	4
Others	Power supply	12 VDC
	Consumption	≤ 15 W (without hard disk or DVD-R/W)
	Working temperature	-10 ° ~ +55 ° C
	Working humidity	10% ~ 90%
	Chassis	19-inch standard rack-mounted 1U chassis
	Dimensions(W x D x H)	440 × 390 × 70 mm
	Weight	≤ 8 kg (without hard disk or DVD-R/W)

AVI INFOSYS LLC

#1005, Executive suite, 10th Floor
The Park Place Tower, Trade Centre-1
Sheikh Zayed Road, PO BOX: 26813
Dubai, United Arab Emirates
Tel: +971(4)358 7036, Fax: +971(4)358 7063
Email: info@avi-infosys.com
Web: www.avi-infosys.com

TOLL FREE 800 AVI (800-284)



AVI INFOSYS

Define → Design → Deploy

An ISO 9001:2008 Certified
IT Solutions Provider Company

INTERNATIONAL OPERATIONS

