

Time Attendance Solution

Product name: AVI TEC

Product Category: Biometric Solutions

Product Sub-category: Time Attendance Systems

Model Number: AVI-FTA-ID-511

The AVI-FTA-ID-511 is a time attendance device designed especially for professional environments. It has an attractive design with touch keys making it extremely user friendly and easy to use. The product is fully TCP/IP enabled which allows you to access the unit from anywhere in the world using an Internet browser. The built-in USB connectivity, which does not require you to install any external cards on your PC, makes it possible for you to connect it with a desktop, laptop, or even your local area network (LAN). Exporting the data to your work station is an effortless exercise and takes less than two minutes. Call us or write to us and we will be honored to arrange a product demonstration for you in your office or factory so that you can see for yourself how amazingly versatile the 511 is and how quickly you can automate one of your most important and routine tasks once the 511 is installed.

FEATURES

- · Elegant design with touch keys.
- Scratchproof high performance Optical Sensor.
- TCP/IP Port : USB Client and Host
- Stores 3000 templates and 1,00,000 transactions
- Fast Processor Speed.
- · FingerPrint/RFID/Proximity Card/PIN based authentication.
- Audio-Visual Indication (Red/Green).
- 3.5 inch Color Multimedia TFT with GUI Interface.
- Built in bell scheduling.
- · Real-time 1-touch data export.

OPTIONAL

SOAP Compliant (for Web based integration).







Blackberry Messenger 🔳 Barcode

(Scan this Barcode to Talk to us online anytime using your BBM)










LAYOUT PLAN

Layout Plan (Standalone)

for illustration only



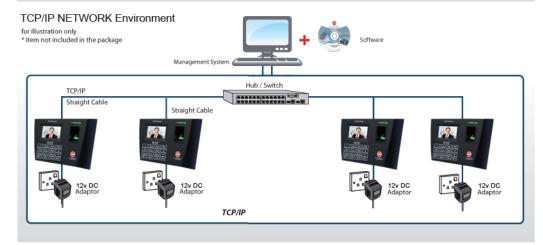

Technical Specifications

Fingerprint capacity	1500/2500/3000
Transaction capacity	1,00,000
Software Platform	Embedded Linux O/S
CPU	6001, 400Mhz
Memory	256M Flash, 32MSDRAM
Fingerprint Sensor	Optical sensor without coating
LED Indicator	Red, Green
Display	128x64 Color Multimedia Screen
Communication	Ethernet, USB-Client, USB-
	HOST,
Identification speed	<2 sec
FAR	<0.0001%
FRR	<1%
Operating Temperature	0-45°C
Operating Humidity	20%-80%
Language	Arabic, English, Spanish,
	Portuguese, French
Power Supply	12V DC, 1.5A
Standard Functions	Scheduled-bell, webserver, short
	message, workcode, DLST
Digits Dimension	151*203*45mm/5*8*2 inches (w*L*D*)

© 2012 AVI INFOSYS LLC. All rights reserved. Product specifications subject to change without notice.







Email. info@avi-infosys.com

International Operations : _____ |





http://www.avi-infosys.com/AVI_FTA_ID_511.html



Product Brochure

http://www.avi-infosys.com/site_download/pdfs/ AVI_FTA_ID_511_flyer.pdf.html



Online Video Guide

http://www.youtube.com/v/rjyl22uMCeQ?autoplay= 1&rel=0&enablejsapi=1&playerapiid=ytplayer









Blackberry Messenger Barcode (Scan this Barcode to Talk to us

(Scan this Barcode to Talk to us online anytime using your BBM)







